

# On Premise Non-Metered Commercial Dryer



## Featuring Microprocessor Controls



### GCEM2900TQ—29" Electric Dryer GCGM2991TQ—29" Gas Dryer

- 7.0 Cu. Ft. Drum Capacity
- Push-Button Controls
- 3 Cycles: Regular/Heavy (High Heat), Permanent Press (Medium Heat), and Knits/Delicates (Low Heat)
- Large Removable, Top-Mounted Lint Screen
- 180 Degree Wide-Opening Side-Swing Door
- Powdered Paint Cabinet and Top
- Rust Proof Stainless Steel Torx® Control Panel Screws
- Front Service Accessibility
- Electric Model Features Element Rated at 5600 Watts, 240 Volt
- Gas Model Features a 22K BTU Burner
- 1/3 HP Motor with Built-In Overload Protector; Centrifugal Switch Turns Off Heating Element When Motor Stops
- Easy-to-Follow Console Instructions
- Power Cord Sold Separately (Electric Model Only)
- **2 Year Limited Parts Only Warranty\***

\*Call 1-800-N0-BELTS for warranty details

#### FOR YOUR CUSTOMERS

- Large Capacity is Ideal for Family-Size Loads
- Increased Capacity Allows Large Loads to Tumble and Spread Reducing Dry Time
- 3 Cycle Options: Regular/Heavy, Permanent Press and Knits/Delicates
- Easy-To-Follow Console Instructions
- 180 Degree Wide-Opening Side-Swing Door Allows For Convenient Access

#### IMPROVED AIRFLOW SYSTEM

- New Blower Housing Wave Insert Increases Air Velocity up to 10%
- Increases Efficiency, Heating Element Lifespan and Improves Fabric Care\*



\*Results per Whirlpool dryer testing conducted 07/03-08/04

#### SINGLE OPERATING THERMOSTAT

- For Simple Accurate Temperature Control



# On Premise Non-Metered Commercial Dryer




## Featuring Microprocessor Controls

### Whirlpool® On-Premise Non-Metered Commercial Dryer Microprocessor Controls

DRYER SPECIFICATIONS		
MODELS	GCEM2990TQ	GCGM2991TQ
<b>GENERAL INFORMATION</b>		
Stainless steel look push button console, white enamel drum, powered paint finish cabinet and top, removable link	Full Console On Premise Electric Dryer	Full Console On Premise Electric Dryer, 3 Cycles: Timed Dry, Automatic, No Heat 3 Temperatures: High, Medium and Low
<b>DRUM VOLUME</b>	7.0 Cu. Ft.	7.0 Cu. Ft.
<b>MODEL</b>	1/3 HP Single-Speed Motor with Built-In Overload Protector, 5.9 Amps Max Rating	1/3 HP Single-Speed Motor with Built-In Overload Protector, 5.9 Amps Max Rating
<b>ELECTRICAL REQUIREMENTS</b>	3-Wire Nominal 240/208 Volt, 60 Hz, A.C. Standard 30 Amp Breaker/Fuse Branch Circuit per Dryer (Subject to Local Codes)	Nominal 120 Volt, 60 Hz, A.C. Standard 15 Amp Breaker/Fuse Branch Circuit per Dryer (Subject to Local Codes)
<b>HEATER TYPE</b>	Electric	Gas*
<b>HEATER/BURNER RATING</b> (Add 500 Watts Approx. for Motor on all Dryer Models)	Heater Rated at 5600 Watts	22,000 BTUH Natural Gas
<b>OPERATIONAL AMPERAGE</b> (Does Not Include Control or Gas Valve)	Motor – 4.0 Amps No Load Heater 23.33 Amps at 240 Volt 27.33 Total	Motor – 4.0 Amps No Load
<b>SHIPPING WEIGHT (EST.)</b>	122 Lbs.	124 Lbs.
<b>DIMENSIONS</b>		
Width – in. (cm)	29 (73.7 cm)	29 (73.7 cm)
Depth – in. (cm)	27.25 (70.5 cm)	27.25 (70.5 cm)
Height – in. (cm)	42.875 (108.9 cm)	42.875 (108.9 cm)
*Burner orifices are available for manufactured, natural, mixed and LP gas with varying BTU ratings. †LP conversion kit: 49572. ††Power cords on electric models sold separately. Energy information is available online at <a href="http://www.whirlpoolcommerciallaundry.com/products">www.whirlpoolcommerciallaundry.com/products</a>		




Dimensions are for planning purposes only. For complete information, see installation instructions packed with product.

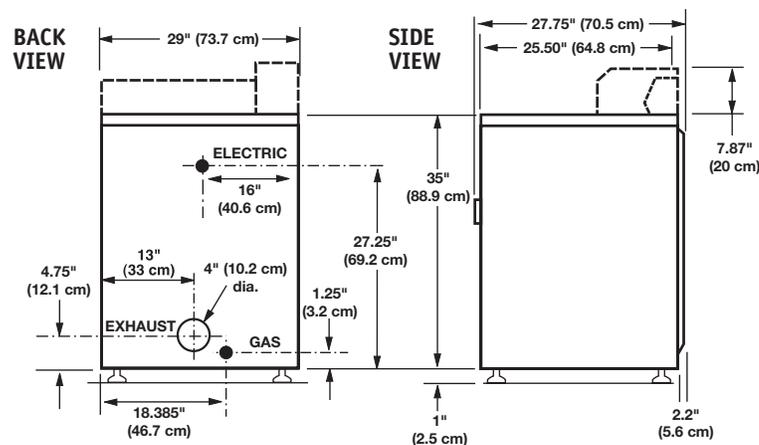

#### Exhaust Information

All dryers require the equivalent of a 4-inch diameter exhaust duct. Rigid metal duct is recommended. Failure to properly exhaust the dryer will result in improper operation.

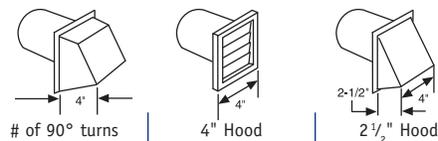

Maximum length of 4" diameter rigid metal duct		
# of 90° turns	4" Hood	2 1/2" Hood
0	64 Ft.	58 Ft.
1	54 Ft.	48 Ft.
2	44 Ft.	38 Ft.
3	35 Ft.	29 Ft.
4	27 Ft.	21 Ft.
Maximum length of 4" diameter flexible metal duct		
0	36 Ft.	28 Ft.
1	31 Ft.	23 Ft.
2	27 Ft.	19 Ft.
3	25 Ft.	17 Ft.
4	23 Ft.	15 Ft.



**EXCLUSIVE 90-DAY FACTORY  
LABOR WARRANTY  
WASHER WARRANTY—2 YEAR  
LIMITED (PARTS ONLY)**

For important information regarding warranty inclusions, exclusions and limitations, please call 1-800-NO-BELTS

To Locate a Distributor Near You, Please Visit [www.whirlpoolcommerciallaundry.com/distributor](http://www.whirlpoolcommerciallaundry.com/distributor), or call 1-800-NO-BELTS

TORX is a registered trademark of Textron Industries, Inc.

®Registered trademark/™Trademark of Whirlpool, U.S.A. ©2010 Whirlpool Corporation. All rights reserved. Whirlpool Corporation • Benton Harbor, Michigan 49022 U.S.A.